



CLEAR2THERE 1080P MOTORIZED BULLET CAMERA



C2TBC32MLPIPOE

- > 2 Megapixel (1920 X 1080)
- > Motorized Lens 3.0 – 12mm
- > Smart IR Up to 40m
- > Triple Streams
- > Low Bitrate, Excellent Low Light Performance
- > ONVIF Compliant
- > IP67, IK10 optional
- > One Year Warranty

H.264 HIGH PROFILE 4.2 COMPRESSION

- Most efficient compression technology available
- Better picture quality
- More storage

FAST MEGAPIXEL IMAGE RATES

- Up to 30fps in full HD 1080p Mode

BUILT-IN 3.0 – 12MM MOTORIZED LENS

- Provides remote focus and zoom adjustment functionality

MULTI-STREAMING

- Two simultaneous independent streams
- Two H.264, each stream can be configured independently:
 - Frames per second
 - Resolution
 - Quality
 - Send to different source

TRUE WIDE DYNAMIC RANGE > 120DB

- Optimizes details in bright/dark areas of a scene

MINI SD SLOT

- Record directly to SD card on alarm
- Supports up to 64GB card

ONVIF COMPLIANCE

- Fully compliant with ONVIF industry standards

REAL TIME STREAMING PROTOCOL (RTSP)

- Allows for compatibility with media players such as Apple QuickTime®, Windows Media Player®, VLC Player®, etc.

BANDWIDTH OPTIMIZATION

- Up to 4x less bandwidth

VIEWBIQUITY COMPLIANCE

- Fully compliant with the Viewbiquity Cloud Application Suite (VCAS) integration platform




CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 605.777.7006
Email: info@clear2there.com
Web: www.clear2there.com

TECHNICAL SPECIFICATIONS

Resolution	2 Megapixel
Effective Pixels (H x V)	1980 x 1080, 1280 x 720, 640 x 360
Video Compression	H.264 High Profile Level 4.2, H.265, MJPEG
Image Sensor	1/2.9" Progressive Scan CMOS, ICR Day/Night
Wide Dynamic Range	True Wide Dynamic Range > 120dB
Digital Noise Reduction	2D / 3D
Frame Rate	Up to 30 fps in Full HD 1080p Mode
Network	10/100 Base-T (RJ-45)
Audio	1 x RCA Input / 1 x RCA Output @ 1v Line Level
Audio Compression	G.711
Storage	Record to ONVIF NVR, FTP, NFS, CIFS, or Mini SD
Corridor Mode	Yes / 9:16
Protocol	ONVIF
Network Protocol	SMTP – Email Notification, Multi-Casting, RTSP / RTP / RTCP, TCP / UDP, HTTP, HTTPS, DHCP, PPPoE, DDNS, NTP
Minimum Illumination	Color: 0.01Lux@(F1.2,AGC ON); B/W: 0Lux@(IR LED ON)
Megapixel Lens Included	3.0 – 12mm Motorized
Infrared	17 Super Flux IR LEDs, up to 40m distance
Motion Detection	Yes
Analog Video Output	Yes
Power Requirements	12VDC / PoE
Temperature	-30° - 60° C

Clear2there reserves the right to change products or specifications without notice.

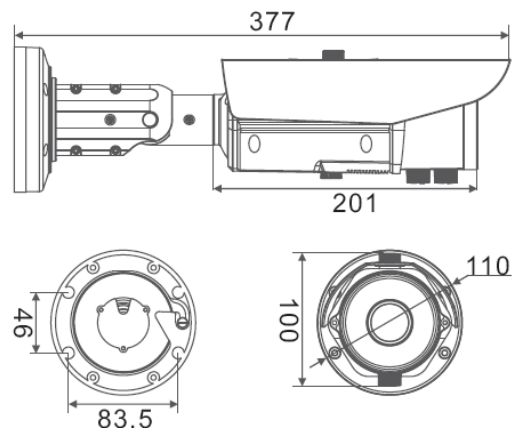

CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 605.777.7006
Email: info@clear2there.com
Web: www.clear2there.com