



CLEAR2THERE 4MP ANTI-VANDAL DOME CAMERA

C2TA54MPLPIPOE

- > 4 Megapixel (2592 x 1520)
- > Motorized Lens 2.7~12mm
- > Wide Dynamic Range
- > Smart IR Up to 30m
- > DC12V / POE / AC24V
- > ONVIF Compliant
- > IP67 / IK10 Rated
- > One Year Warranty

MOTORIZED LENS WITH AUTO ZOOM/FOCUS

- Quickly and easily focus on a person or object of interest for better identification

H.264 HIGH PROFILE 4.2 COMPRESSION

- Most efficient compression technology available
- Better picture quality and more storage

FAST MEGAPIXEL IMAGE RATES

- 30fps (for all resolutions)

MULTI-STREAMING

- Up to three simultaneous independent streams
- Two H.264 and one MJPEG, each stream can be configured independently:
 - Frames per second
 - Resolution
 - Quality
 - Send to different source

MINI SD SLOT

- Record directly to SD card on alarm
- Supports up to 128GB card

ONVIF COMPLIANCE

- Fully compliant with ONVIF industry standards

DIGITAL ZOOM

- Zoom live or after event while recording full field of view in HD

REAL TIME STREAMING PROTOCOL (RTSP)

- Allows for compatibility with media players such as Apple QuickTime®, Windows Media Player®, VLC Player®, etc.

BANDWIDTH OPTIMIZATION

- 30fps (in optimization mode)
- Up to 4x less bandwidth

VIEWBIQUITY COMPLIANCE

- Fully compliant with the Viewbiquity Cloud Application Suite (VCAS) integration platform




CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 605.777.7006
Email: info@clear2there.com
Web: www.clear2there.com

TECHNICAL SPECIFICATIONS

Resolution	4 Megapixel
Effective Pixels (H x V)	2592 x 1520, 2560x1440, 2304x1296, 1920 x 1080, 1280 x 720, 640 x 360
Video Compression	H.264 High Profile Level 4.2, MJPEG
Image Sensor	1/3" Progressive Scan CMOS
Wide Dynamic Range	DWDR
Noise Reduction	2D / 3D DNR
Frame Rate	30fps (for all resolutions)
Network	10/100 Base-T (RJ-45)
Audio	1 x RCA Input / 1 x RCA Output @ 1v Line Level
Audio Compression	G.711
Storage	Record to ONVIF NVR, FTP, NFS, CIFS, or Micro SD
Corridor Mode	Yes / 9:16
Protocol	ONVIF
Network Protocol	SMTP – Email Notification, Multi-Casting, RTSP / RTP / RTCP, TCP / UDP, HTTP, DHCP, PPPoE, DDNS, NTP
Minimum Illumination	Color:0.05Lux@(F1.2,AGC ON), B/W:0Lux@(IR LED ON)
Lens Included	2.7~12mm Motorized
Pan/Tilt/Rotation Range	Pan:0°~355°, Tilt:0°~80°, Rotation:0°~355°
Infrared	15pcs, up to 30M distance
Motion Detection	Yes
Analog Video Output	Yes
Power Requirements	DC12V / POE / AC24V

DIMENSIONS (mm)

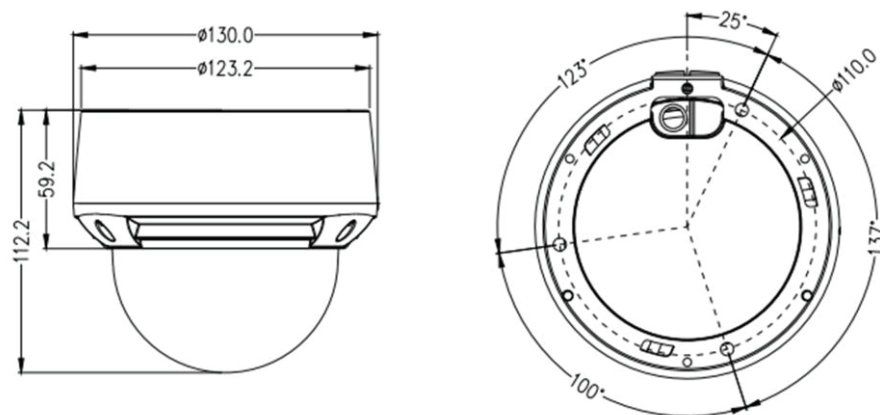

CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 605.777.7006
Email: info@clear2there.com
Web: www.clear2there.com